



Mono-Crystalline

KOREA : 73-27, Ihwaseogil, Dunpo-Myeon Asan-city, ChoongNam, Province
CHINA : 305, Dushi Road, Minhang District, ShangHai, China
AUSTRALIA : Unit 2 175 Briens Rd Northmead 2152 NSW AUSTRALIA

www.jspv.co.kr
sales@jspv.co.kr

JSMM2501

제품규격[Physical Characteristics]


- ▣ 모델명 [Module Name] : JSMM2501
- ▣ 전지종류 [Cell Type] : 단결정(Mono)
- ▣ 전지크기 [Cell Demension] : 156mm x 156 mm
- ▣ 배열 [Cell Arrangement] : 6 String x 10 = 60 Cells
- ▣ 모듈규격 [Module Demension] : 1,646mm x 990mm x 45 (±1mm)
- ▣ 중량 [Weight] : 19kg
- ▣ 최대하중 [Maximum Load] : 5,400(pa)



제품보증[Warranty]

- ▣ 제품보증 [Product Warranty] : 10 years for product warranty
: 10 years for 90% of warranted minimum power
- ▣ 출력보증 [Output Warranty] : 25 years for 80% of warranted minimum power


제품인증[Certification]

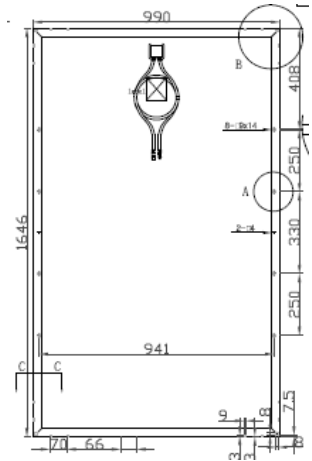


Mono-crystalline Photovoltaic Module Series

Model	P.max[W]	Vmp[V]	Imp[A]	Voc[V]	Isc[A]	Efficiency[%]
JSMM2501	250	30.60	8.25	38.00	8.80	15.55

All electrical data measured under standard test conditions:1000W/m² AM1.5,25°C / Tolerance ~ +4.99w Rel.

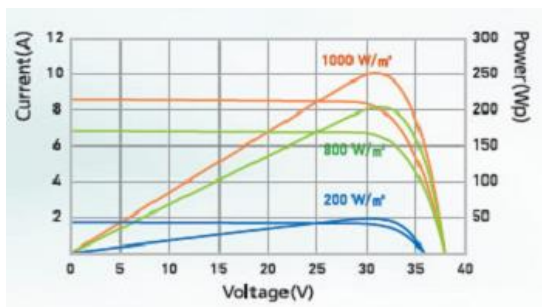

IV behavior at various degrees of irradiation intensity

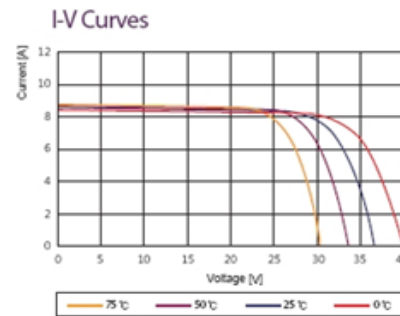

IV behaviour for various temperatures

All data were derived under standard test conditions, Standard test conditions:light spectrum AM=1.5; irradiation intensity E=1000W/m² ; Cell temperature T=25°C